


Plan View

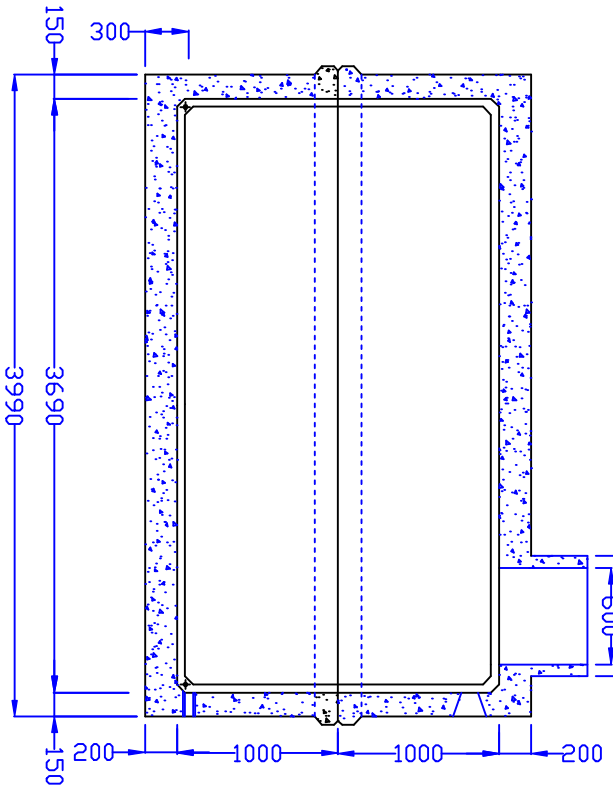


Section A-A

- Notes:**
1. Concrete 35 mpa - Air 6-7%
 2. Unit reinforced for H-20 loading.
 3. Openings in top can be moved or resized.
 4. Joint between bottom and top sealed with butyl sealant. (supplied)
 5. Weight of each half - 11,000 kg.
 6. Unit will be set by Acton Precast truck provided site conditions allow.
 7. Capacity 4000 Imp. Gal. (18000L)
- * all dim. in mm. *

Acton Precast Concrete Limited
4000 Gal H/D Holding

tel 1-800-461-1516 fax 519-853-1324

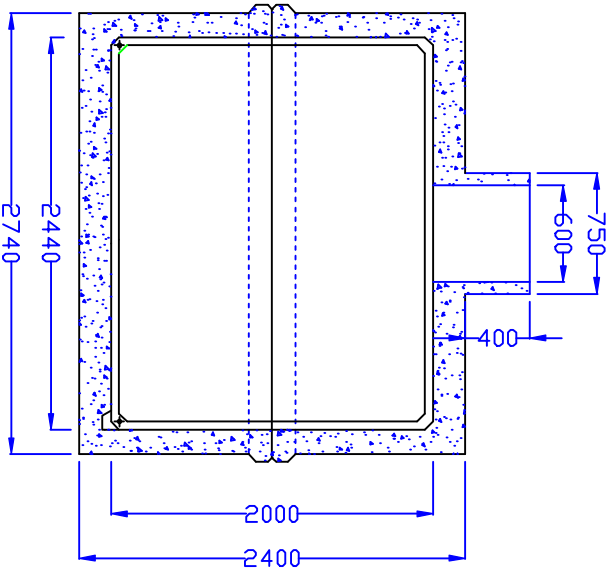

Section B-B